


LED Wall Lamp





Introduction

This wall lamp adopts ADC12 aluminum housing which can provide excellent thermal management; it also with unique up and down light functional design ; the beam angle can be adjusted by the flexible aluminum plate.






Features

- IP65 waterproof
- Up and down luminous design.
- Aluminum heat sink provides excellent thermal management
- Environment friendly, without Mercury or any other hazardous substances.

Application Areas

It is designed for indoor and outdoor lighting applications hotel, park, and corridors etc.

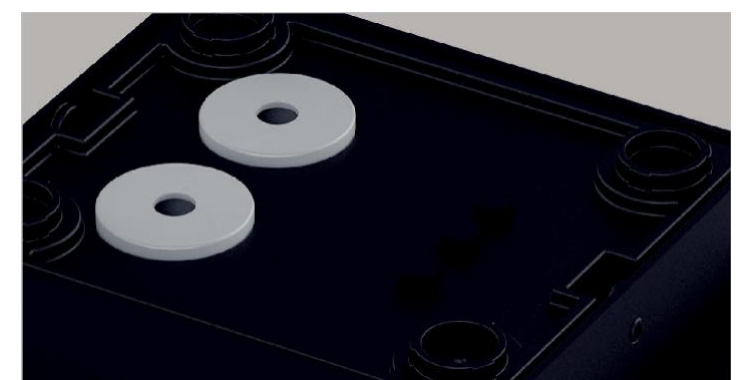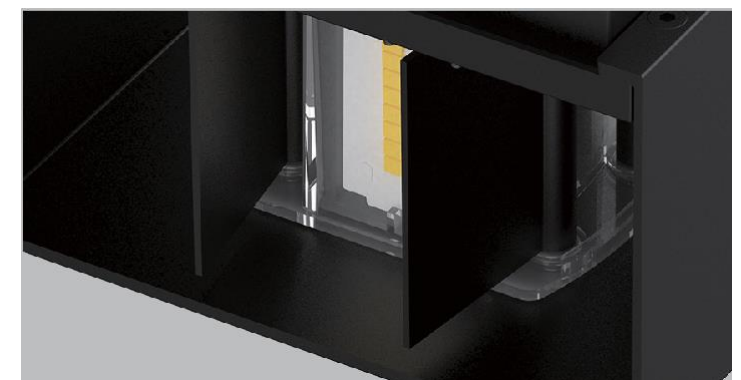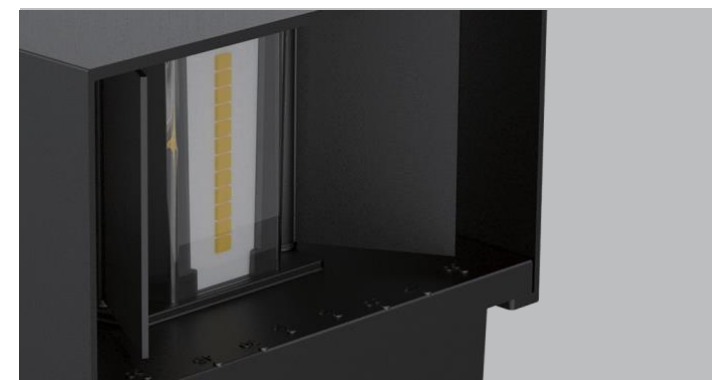





62906
Mains Cable entry(2×)

Technical Data Sheet

Code No.			62906
Dimension(mm)			120*96.8*100
Cutout (mm)			-
Watt(W)			2×5W
Rated Input Voltage(V)			AC230V
Input Voltage(V)			AC100-240V
LED Module Input			DC66-76V
Light Source			SMD
SDCM			<6
CCT(K)			1-CCT: 3000K/4000K/5000K/5700K
CCT Selection DIP Switch			NO
Luminous Flux (lm) ±5%	Non-DIM	1-CCT	750~900
	DIM		-
	Non-DIM	3-CCT	-
	DIM		-
CRI			≥80
Beam Angle (°)			Adjustable 15°~120°
UGR			-
LED Driver			Built-in
Dimming Option			NO
Sensor			NO
Emergency Kits			NO
Electrical Class			Class I
Ingress Protection (IP Rating)			IP65
Impact Resistance (IK Rating)			IK06
Product Finishing(Base)			Black RAL9005
Materials of Optics			PC
Materials of Housing			Aluminium /PC
Lifetime (hr)			50,000h
Glow wire test (°C)			750°C
Operating Temp. (°C)			-20°C ~45°C
Storage Temp. (°C)			-20°C ~60°C
Installation			Wall mount

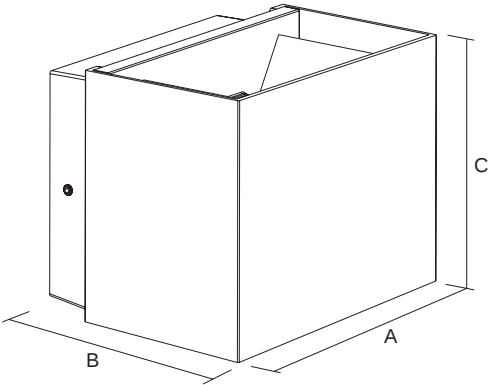



15°~120°



IP65



PF 0.9



CRI ≥80





50000 HOURS

Measurement

Code	Dimension(mm)			Size(mm)	Product Weight (Kg)		Package weight (Kg)		Carton Size(cm)	Qty/CTN
	A	B	C		N.W/PC	G.W/PC	N.W/CTN	G.W/CTN		
62906	120	96.8	100	120*96.8*100	0.59	0.71	10.62	13.58	39*31.5*40	18

Driver Datasheet (Non-Dimmable)

Total load wattage			10W
Output	Output Voltage range	DC60-80V	
	Rated output current	140mA	
	Line Regulation	±5%	
	Setup, Rise Time	1S	
	Flickering Index	-	
Input	Input Voltage	AC85-265V	
	Rated Input Voltage(V)	AC100-240V	
	Frequency	50/60Hz	
	Input Current	≤0.11A	
	Rated Input Current	0.1A	
	Power Factor	0.9	
	THD	-	
	Efficiency	≥87 %	
	No load wattage	<0.5W	
Protection	Short circuit protection	Pass	
	Over voltage protection	Pass	
	Over temperature protection	Pass	
Safety &EMC	Withstand voltage	-	
	Isolation Resistance	-	
	Surge	IEC61000-4-5(L-N:0.5KV, L/N-PG:1KV)	
	EMC Emission	EN55015, EN61000-3-2	
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11; EN61547	

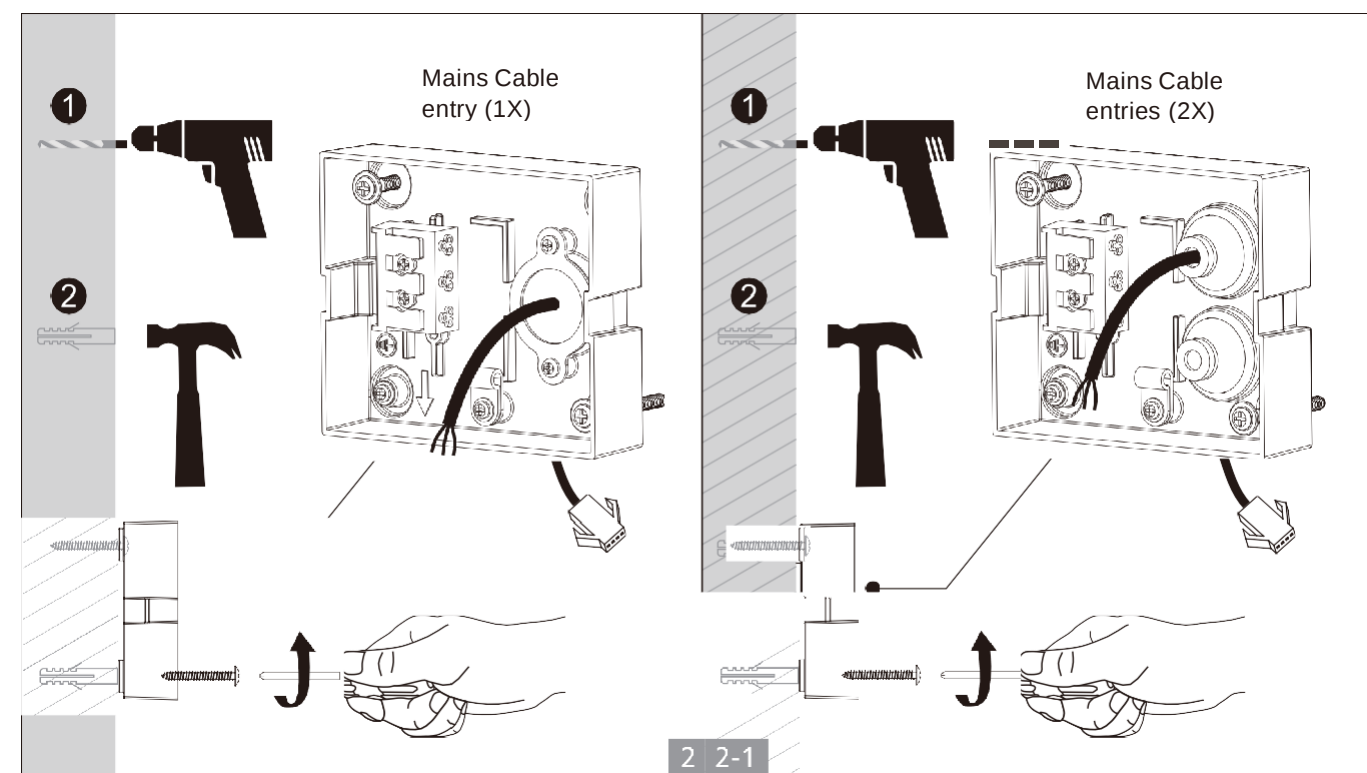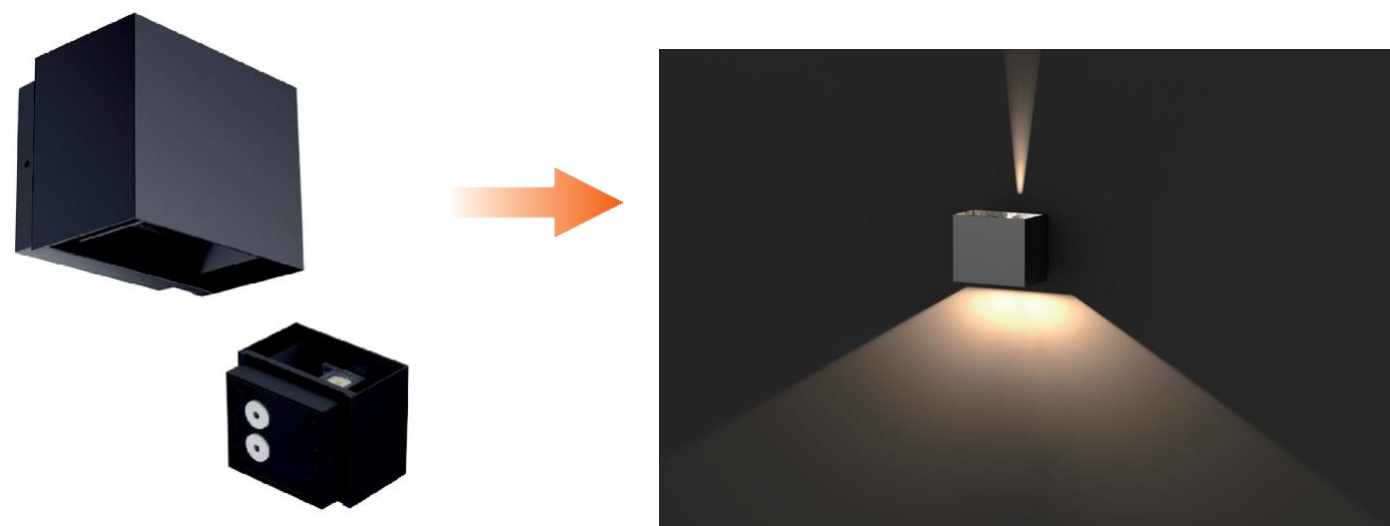

Installation Instruction

WARNING

1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.
3. Professional electrician for installation and maintenance only.

